

imageCLASS X  
C1533iF II

Canon  
Delighting You Always



# LAYERS OF EFFICIENCY

Print Productivity Made Easy



Up-to-date  
Security Features



Compact and High-speed  
Performance



Easy to Use  
Interface

**Business Can** Be Simple


# Driving Efficient Workflows Effortlessly

Equipped with fast scanning capabilities and intuitive user interface, the **imageCLASS X C1533iF II** offers greater productivity for your document workflows. Providing high performance, swift printing operations and security functionalities, the multi-functional device is designed to offer quality results and solutions in an effortless manner.

## High Performance in a Compact Size

**Swift printing and scanning speeds** offer greater document efficiency and the **easy to use user interface** allows smooth navigation between different functions. The imageCLASS X C1533iF II's **compact size** allows it to easily fit into a multitude of workspaces, providing users with placement flexibility.

## Wide range of paper support

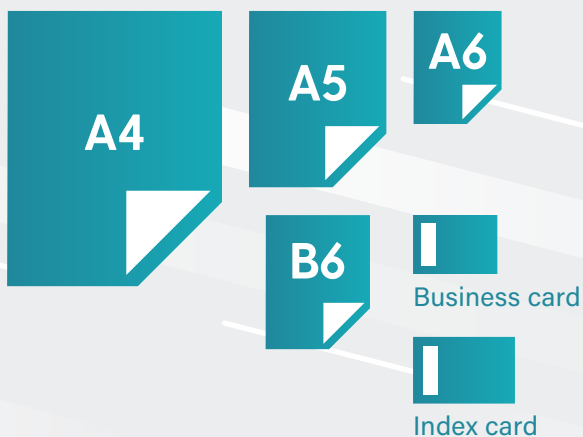

The user interface displays **simple and clear icons**, offering excellent visibility for users accessing the device. Past jobs can also be quickly called out just through one touch from the Timeline function.






With **Smart Scan**, documents scanned can be automatically rotated for easy viewing.



Save time and ensure your documents are scanned properly with the **Scan Preview** function, which allows you to check your document orientation, move or delete pages at the device before sending.

Scan Preview Screen

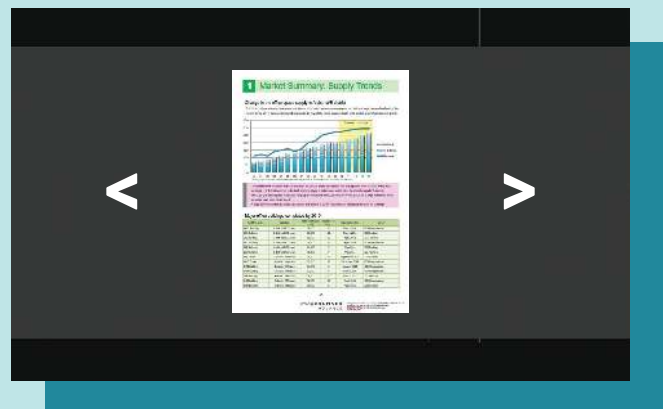

## Fortifying Business Security



Ensuring your documents are well protected is crucial. From **user authentication** to **encryption**, the multifunction device ensures your data is protected from start to end.

## Providing Sustainability All Around



The imageCLASS X C1533iF II drives sustainability with the use of **recycled materials** in the device as well as in the cartridge packaging.

## Easier Centralised Management



Users looking for centralised print management can invest in **uniFLOW Online**, a cloud-based solution that can help facilitate management of their print environment.

SPECIFICATIONS

MAIN UNIT	
Machine Type	A4 Colour Laser Multifunctional
Core Functions	Print, Copy, Scan, Send and Fax
Control Panel	7 inch TFT LCD WVGA colour Touch panel
Memory	Standard: 2.0GB RAM
Storage	eMMC: 30GB
Interface Connection	<b>Network</b> Standard: 1000Base-T / 100Base-TX / 10Base-T, Wireless LAN (IEEE 802.11 b/g/n) <b>Others</b> Standard: USB 2.0 (Host) x2, USB 2.0 (Device) x1
Paper Supply Capacity (A4, 80gsm)	Standard: 650 sheets Maximum: 2,300 sheets (with Cassette Feeding Unit-AV1)
Paper Output Capacity (A4, 80gsm)	200 sheets
Supported Media Types	<b>Multi-purpose Tray</b> Thin, Plain, Recycled, Colour, Heavy, Bond, Envelope, Postcard, Letterhead <b>Paper Cassette</b> Thin, Plain, Recycled, Colour, Heavy, Bond, Labels, Letterhead
Supported Media Sizes	<b>Multi-purpose tray</b> Standard size: A4R, A5, A5R, A6R, B5R, B6R, Envelopes [No. 10 (COM 10), Monarch, ISO-C5, DL] Custom Size / Free Size: Min. 76.2 x 127.0 mm up to 216.0 x 355.6 mm <b>Paper Cassette</b> Standard size: A4R, A5, A5R, A6R, B5R, B6R Custom Size/Free Size: 101.6 x148.0 mm - 216.0 x297.0 mm
Supported Media Weights	Multi-purpose tray: 60 to 216 gsm Paper Cassettes: 60 to 163 gsm Duplex: 60 to 163 gsm
Warm-up Time	Quick Startup Mode: 4 Seconds or Less* *Time from device power-on to when key operations can be performed on the touch panel display From Sleep Mode: 10 seconds or less From Power On: 10 Seconds or Less* *Time from device power on, until copy ready (not print reservation)
Dimensions (W x D x H)	500 x 556 x 640 mm
Installation Space (W x D)	717 x 785 mm
Weight	Standard: Approx. 41.0 kg including toner
PRINT SPECIFICATIONS	
Print Speed (BW/CL)	Up to 33/33 ppm (A4), Up to 40/40 ppm (A5R), Up to 55/55 ppm (A5)
Print Resolution (dpi)	600 x 600 2400 (Equivalent) x 600 (Default)
Page Description Languages	Standard: UFR II, PCL6, Optional: Adobe PostScript 3
Direct Print	Supported file types: RUL: PDF, EPS, TIFF/JPEG, XPS USB Memory: PDF, TIFF/JPEG, XPS Network Place: PDF, TIFF/JPEG, XPS
Printing from Mobile and Cloud	AirPrint, Mopria, Canon PRINT Business and uniFLOW Online
Fonts	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T <sup>1</sup> (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts <sup>2</sup>  <sup>1</sup> Requires optional PCL INTERNATIONAL FONT SET-A1 <sup>2</sup> Require optional BARCODE PRT KIT-D1
Operating System	UFR II: Windows*10 / Windows*11 / Windows*Server2016 / Windows*Server2019 / Windows*Server2022, macOS (10.13 or later)  PCL: Windows*10 / Windows*11 / Windows*Server2016 / Windows*Server2019 / Windows*Server2022  PS: Windows*10 / Windows*11 / Windows*Server2016 / Windows*Server2019 / Windows*Server2022, macOS (10.13 or later)  PPD: Windows*10 / Windows*11, macOS (10.13 or later)
COPY SPECIFICATIONS	
Copy Speed (BW/CL)	Up to 33/33 ppm (A4) Up to 40/40 ppm (A5R), Up to 55/55 ppm (A5)
First-Copy-Out Time (A4, BW)	Approx. 5.9 / 6.9 seconds or less
Copy Resolution (dpi)	600 x 600
Multiple Copies	Up to 999 copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	25% - 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 70%, 81%, 86%, 100%, 115%, 122%, 141%, 200%, 400%

SCAN SPECIFICATION	
Type	Standard: Single-pass Duplexing Automatic Document Feeder
Document Feeder Paper Capacity (80 gsm)	Up to 100 sheets
Acceptable Originals and Weights	Platen: Sheet, Book Document Feeder media weight: 1-sided scanning: 42 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)
Supported Media Sizes	Platen: Max. scanning size: 216.0 x 355.6 mm Document Feeder media size: A4R, A5R, A6R, B5R Custom size: 48.0 x 128.0 mm to 216.0 x 355.6 mm
Scan Speed (ipm: BW/CL, A4)	DADF: 1-sided Scanning: 95 ipm / 95 ipm (300 dpi, send), 95 ipm / 50 ipm (600 dpi, copy) 2-sided Scanning: 190 ipm / 190 ipm (300 dpi, send), 140 ipm / 100 ipm (600 dpi, copy)
Scan Resolution (dpi)	Scan for Copy / Fax: up to 600 x 600 Scan for Send: (Push, BW) up to 600 x 600, (Pull, BW) up to 600 x 600 (Push, CL) up to 300 x 300, (Pull, CL) up to 300 x 300
Pull Scan Specifications	Color Network ScanGear2. For both TWAIN and WIA Windows*10 / Windows*11 / Windows*Server 2016 / Windows*Server 2019 / Windows*Server 2022
SEND SPECIFICATIONS	
Destination	Standard: E-mail / Internet FAX (SMTP), Super G3 FAX, SMB3.0, FTP, WebDAV
Address Book	LDAP (2,000)/ Local (1,600) / One-touch (200)
Send Resolution (dpi)	Push: 100 x 100, 150 x 150, 200 x 100 (Normal), 200 x 200 (Fine), 200 x 400* (SuperFine), 300 x 300, 400 x 400* (UltraFine), 600 x 600*  Pull: 75 x 75, 100 x 100, 150 x 150, 200 x 200, 300 x 300, 400 x 400*, 600 x 600*  *Black and white only
Communication Protocol	File: FTP (TCP/IP), SMB3.0 (TCP/IP), WebDAV Email/iFax: SMTP (send), POP3 (receive)
File Format	Standard: TIFF (MMR), JPEG*, PDF (Compact, Searchable, PDF/A-1b, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature), Office Open XML (PowerPoint, Word)  Optional: PDF (Trace & Smooth), PDF/XPS (User Signature)  *Single page only
FAX SPECIFICATIONS	
Maximum Number of Connection Lines	1
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	400 x 400 (Ultrafine), 200 x 400 (Superfine), 200 x 200 (Fine), 200 x 100 (Normal)
Sending / Receiving Size	Sending: A4, A5*, A6*, B5 <sup>1</sup> Receiving: A4, A5, B5  <sup>1</sup> Sent as A4
FAX Memory	Up to 30,000 pages
Speed Dials	Max. 200 dials
Group Dials/ Destinations	Max. 199 dials
Sequential Broadcast	Max. 256 addresses
Memory Backup	Yes
STORE SPECIFICATIONS	
Memory Media	Standard: USB Memory
ENVIRONMENTAL SPECIFICATIONS	
Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80% RH (Relative Humidity)
Power Source	220-240V 50/60Hz 3.9A
Power Consumption	Maximum: Approx. 1,500 W Standby: Approx. 40.6 W <sup>1</sup> Sleep mode: Approx. 0.9 W <sup>2</sup>  <sup>1</sup> Reference value: measured one unit <sup>2</sup> Sleep mode is not available in all circumstances due to certain settings.
CONSUMABLES	
Toner Yield (Estimated Yield @5% Coverage)	T10 TONER BK: 13,000 pages T10 TONER C/M/Y: 10,000 pages
OTHER ACCESSORIES	
	Cassette Feeding Unit-AV1, Paper Feeder PF-D1, MiCARD Attachment Kit-B1, PCL International Font Set-A1, PCL Asian Font Set-A1, Universal Send Trace & Smooth PDF Kit-A1, Universal Send Digital User Signature Kit-C1, Barcode Printing Kit-D1, Copy Control Interface Kit-C1, ADF Access Handle-A1



Delighting You Always

SOUTH AND SOUTHEAST ASIA REGIONAL HEADQUARTERS  
**CANON SINGAPORE PTE. LTD.**  
1 Fusionopolis Place, #14-10 Galaxis, Singapore 138522  
Tel : 65-6799-8888 | Fax : 65-6799-8882 | <https://asia.canon>

DEALER'S STAMP

This document is for information purposes only. The contents are subject to change without notice. Product options, name and availability may vary by regions. We expressly disclaim any liability or contractual obligations with respect to this document. Brands and product names are trademarks and/or registered trademarks of their respective owners.