



imageRUNNER C3326i

# RELIABILITY, SECURITY AND HIGH PRODUCTIVITY FROM A COLOUR A3 MULTIFUNCTION PRINTER

Maximise uptime and simplify maintenance with unrivalled device durability



PRODUCTIVITY



SECURITY



CONTROL AND  
MAINTENANCE



USER EXPERIENCE



CLOUD  
CONNECTIVITY



SUSTAINABILITY

**Canon**

---

# imageRUNNER C3326i

## PRODUCTIVITY

- Fast warm-up time starts print production more quickly
- Print a wide variety of media types and sizes, continuously in high-volume
- Personalise the user display configuration to enhance document processing efficiency
- Streamline document post-production with optional finishing options, including eco-staple, staple and punch
- Optional encrypted SSD storage extends data storage and is more resistant to vibration and shock for increased reliability

## USER EXPERIENCE

- Easy to use 7-inch/17.8cm touchscreen provides excellent visibility and usability for intuitive handling
- Optimise print, copy, scan and send document workflows to one-touch operation
- Combine multiple settings into one button for super-fast document processing
- Repeat previous jobs at the touch of a button with Timeline setting history

## SECURITY

- Verify System at start up supporting Platform Firmware Resiliency (NIST SP800-193) and Automatic Recovery, SIEM support and McAfee Embedded Control analyse the device in real-time to detect and prevent external attacks

- Set up device authentication, two-factor authentication and device function restrictions for both device and cloud-based security measures
- Optional Encrypted SSD storage extends data protection and is more resistant to vibration and shock for increased reliability
- Upgrade to uniFLOW Online\* for enhanced secure printing, mobile printing, and guest printing from any device
- Data privacy across your network is ensured with IPSec, port filtering and TLS 1.3 & WPA3 support
- Step-up security further with easy-to-programme Security Navigator or let Canon's experts create best solution for your business environment

## CLOUD CONNECTIVITY

- Save scanned documents to your email or Google Drive/Google Workspace using personalised workflows with uniFLOW Online Express
- File Assist automatically names, sorts and create a folder structure for files
- Print wirelessly from mobile devices, with support for Apple AirPrint and Mopria
- Add extra functionality to mobile printing and scanning with Canon's PRINT Business app

## CONTROL AND MAINTENANCE

- Centrally manage all devices on the network with cloud-based remote management options
- Remote Operators Software Kit provides alternative access to device for remote operation of all system functions
- Compatibility with Canon's uniFLOW software solutions allows for tracking and reporting of print jobs
- e-Maintenance can improve uptime through remote diagnostics, automated meter readings and consumables monitoring

## SUSTAINABILITY

- Edit print settings at device-level to reduce paper and toner wastage
- Converting document to digital files minimises paper usage
- Eco-stapling option allows for further reduction of consumables
- Energy saving features, such as Sleep Mode help to decrease power consumption
- Better typical energy consumption (TEC value) compared to previous series minimises running costs

\*uniFLOW Online is available as a Device Based Cloud Subscription for Document Output and Capture Management. Based on business needs, users can upgrade to uniFLOW Online to unlock a range of advanced benefits, including: Increased security with user authentication methods. Personalised workflows to enhance productivity. Reduced wastage by releasing jobs at the device. An intuitive cloud dashboard to leverage real-time data. Greater control over access and usage to reduce print costs.


## QUICK FACTS

- Print, Copy, Scan and Send
- 7-inch/17.8cm WVGA colour touchscreen
- One-touch operation with Timeline and Shared/Personal buttons
- Print speed of up to 26ppm
- Support for a wide range of media types and sizes
- uniFLOW Online Express\* cloud-based print management solution
- Automatic file naming, sorting and folder structure with Filing Assist\*\*
- Document, device and network security from McAfee Protected Control, TLS1.3, WPA3 and SIEM support
- Easy maintenance with automatic firmware updates
- Finishing options include eco staple, staple and punch

\*requires activation

\*\*available with subscription to uniFLOW Online Cloud based print management solution

## TAILORED SOLUTIONS TO MEET EVERY CHALLENGE

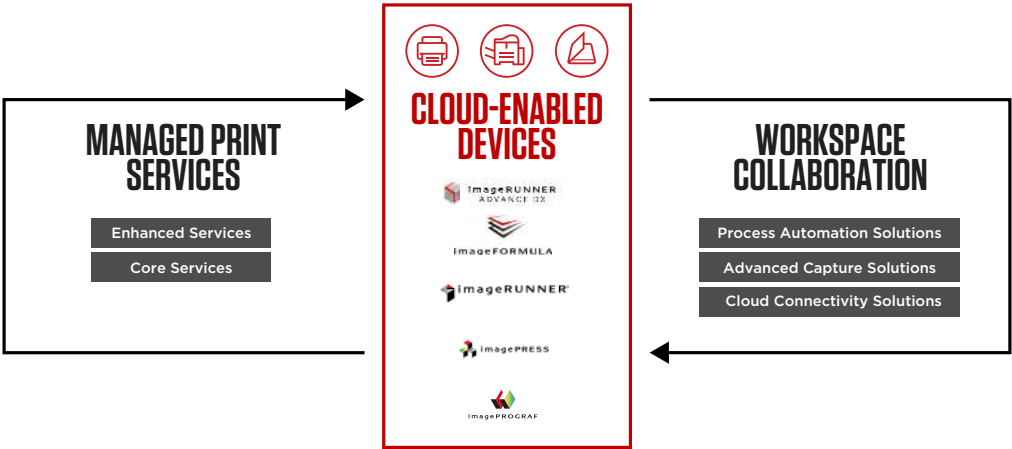


Canon's Digital Transformation Services (DTS), bring together our leading hardware and software into an integrated technology ecosystem, designed to support your transformation journey. This offering combines Managed Print Services and Workspace Collaboration solutions, to help you gain transparency and control over the entire document lifecycle.



## imageRUNNER C3326i

# RELIABILITY, SECURITY AND HIGH PRODUCTIVITY FROM A COLOUR A3 MULTIFUNCTION PRINTER

### MAIN CONFIGURATION OPTIONS

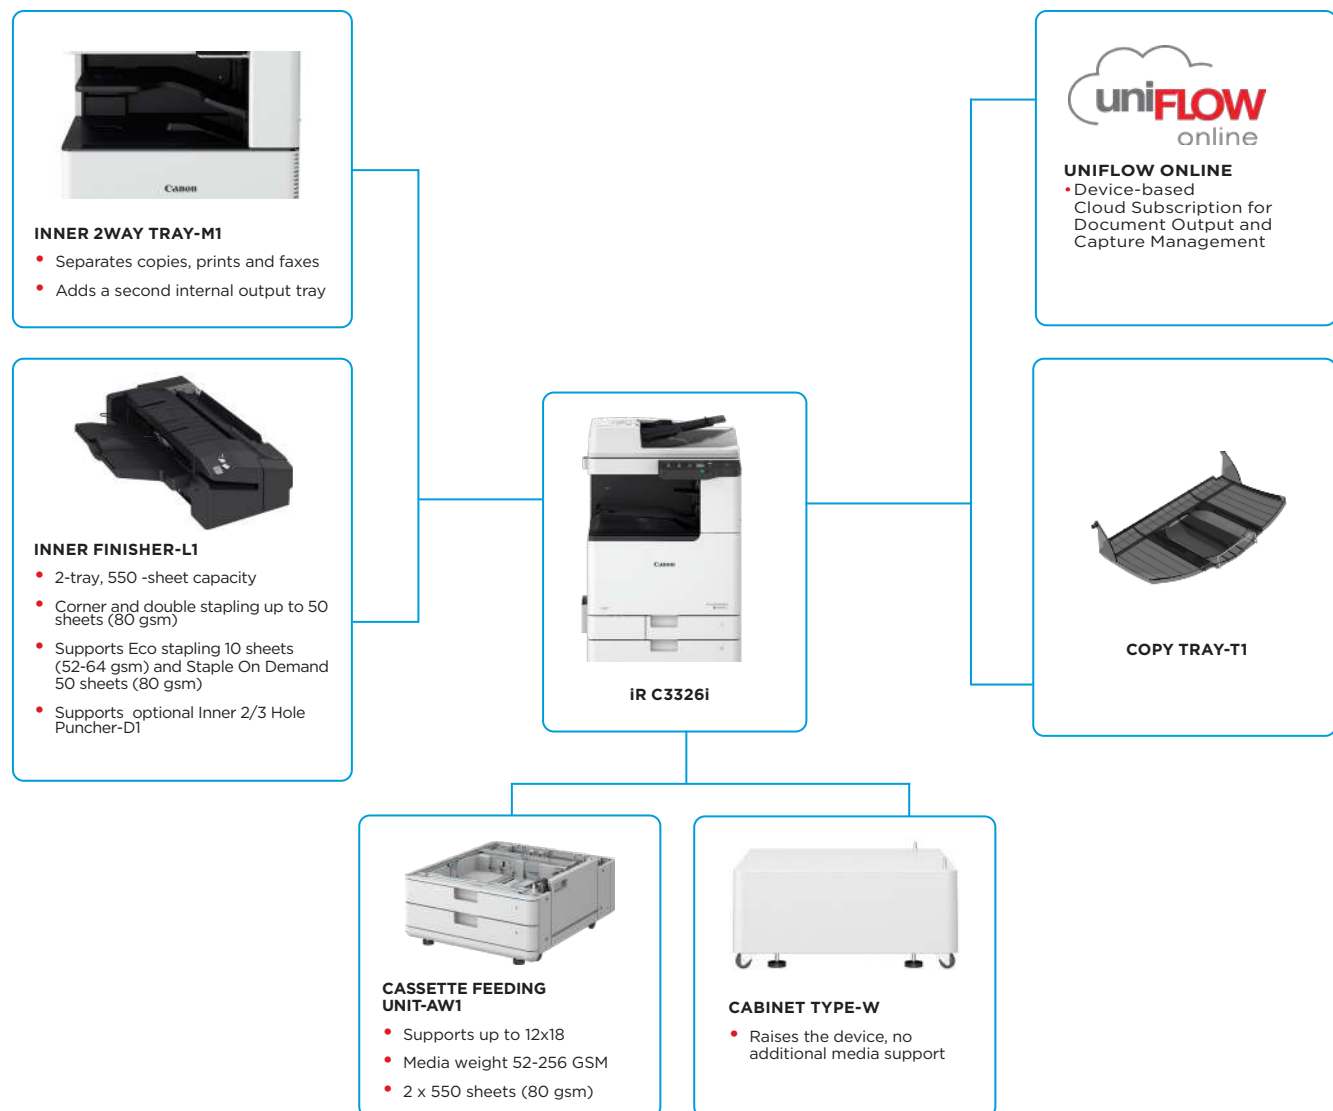

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the product configurator.

**Canon**

TECHNICAL SPECIFICATIONS

imageRUNNER C3326i

MAIN UNIT

Machine type	A3 Colour Laser Multifunctional
Core functions	Print, Copy, Scan, Send and Optional Fax
Processor	1.6 GHz Dual Core Processor
Control Panel	17.8 cm/7 inch TFT LCD WVGA Colour Touch panel
Memory	Standard: 2.0GB RAM
Storage	Standard: (eMMC) 64GB Optional: (SSD) 256GB
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE802.11b/g/n) OTHERS Standard: USB 2.0 (Host) x 2, USB 2.0 (Device) x 1
Paper Supply capacity (A4, 80gsm)	Standard: 1,200 Sheets Maximum: 2,300 Sheets (with optional Cassette Feeding Unit-AW1)
Paper output capacity (A4, 80gsm)	Standard: 250 Sheets Maximum: 650 Sheets (with optional Inner Finisher-L1 and Copy Tray-T1)
Finishing capabilities	Collate, Group, Offset, Staple, Hole Punch, Eco Staple, Staple On Demand * Finishing capabilities vary, depending on the options selected

Supported Media Types

Multi-purpose Tray:  
Thin, Plain, Heavy\*, Recycled, Coated, Colour, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Envelope  
\* SRA3 is unsupported for Coated (257-300gsm) and Heavy (257-300gsm) paper  
  
Upper Cassette:  
Thin, Plain, Recycled, Colour, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope\*  
\* Envelope Feeder Attachment Kit B (standard) is required.  
  
Lower Cassette:  
Thin, Plain, Heavy, Recycled, Colour, Bond, Transparency, Pre-punched, Letterhead, Envelope\*  
\* Envelope Attachment Kit A (standard) is required.

Supported media sizes

Multi-purpose Tray:  
12"x18", 11"x17", Legal, Letter, Letter-R, Executive, Statement, Statement-R  
  
Custom Size/Free Size: 4" x 5-7/8" to 12" x 18", Envelopes (COM10 No.10, Monarch, ISO-C5, DL), Envelope Custom Size ( 3-7/8" x 3-7/8" to 12-5/8" x 18")  
  
Upper Cassette: Letter, Executive, Statement-R Custom Size (4-1/8" x 5-7/8" to 11-3/4" x 8-1/2"), Envelopes (ISO-C5) Lower Cassette:12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (4-1/8" x 5-7/8" to 12" x 18"), Envelopes6 (COM10 No.10, Monarch, DL)  
\* Envelope Attachment Kit A (standard) is required.

Supported media weights

Multi-purpose tray: 52 to 300 gsm  
Upper/Lower Cassette: 52 to 256 gsm

Warm-Up Time (Quick start mode:ON)

Duplex: 52 to 220 gsm  
4 Seconds or Less\*  
\*Time from device power on to when copy icon appears and is enabled to operate on the touch panel display From Sleep Mode: 10 Seconds or Less  
  
10 Seconds or Less\*  
\*Time from device power on, until copy ready (not print reservation)

Dimensions (W x D x H)  
Installation Space (W x D)  
Weight

565 x 687 x 891 mm  
1168 x1116 mm  
Approx. 74.7 kg including toner

PRINT SPECIFICATIONS

Print Speed

1-sided (BW/CL):  
Up to 26/26 ppm (Letter), Up to 20/20 ppm (Letter-R),Up to 15/15 ppm (Legal/11"x17")  
  
2-sided (BW/CL):  
Up to 26/26 ipm (Letter), Up to 20/20 ipm (Letter-R), Up to 15/15 ipm (Legal/11"x17")

Print Resolution (dpi)

Up to 1200 x1200  
Standard: UFR II, PCL6  
Optional: Adobe® PostScript®3™

Page description languages

Direct Print

Supported file types:  
RUI: PDF, EPS, TIFF/JPEG, XPS  
USB Memory: PDF, TIFF/JPEG, XPS  
Network Place: PDF, TIFF/JPEG, XPS

Printing from mobile and cloud

AirPrint, Mopria, Canon PRINT Business, uniFLOW Online and Universal Print by Microsoft  
A range of software solutions is available to provide printing from mobile devices and cloud-based services depending on your requirements. Please contact your sales representative for further information

OS Standard Printing

Android/Windows® 10/Windows® 11/Chrome OS/ macOS (11.2.2 or later), iOS (15.2 or later), iPadOS

Fonts

PS fonts: 136 Roman  
PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono VT  
J/K/S/T\* (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts\*2  
\*1 Requires optional PCL INTERNATIONAL FONT SET-A1  
\*2 Requires optional BARCODE PRT KIT-D1

Print Features

Secure Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/ Orientations, Toner Reduction, Poster Printing, Forced hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer

Operating System

UFRII: Windows® 8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022, Mac OS X (10.11 or later)  
PCL: Windows®8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022  
PS: Windows®8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022, Mac OS X (10.11 or later)  
PPD: Windows® 8.1/10/11, Mac OS X (10.11 or later)

COPY SPECIFICATIONS

Copy Speed

1-sided (BW/CL):  
Up to 26/26 ppm (Letter), Up to 20/20 ppm (Letter-R),Up to 15/15 ppm (Legal/11"x17")  
2-sided (BW/CL):  
Up to 13/13 ppm (Letter), Up to 10/10 ppm (Letter-R), Up to 7/7 ppm (Legal/11"x17")  
(BW/CL): Approx. 7.0 / 8.7 seconds or less

First-Copy-Out Time  
Copy resolution (dpi)  
Multiple Copies  
Copy Density  
Magnification

600 x 600  
Up to 999 copies  
Automatic or Manual (9 Levels)  
25% - 400% (1% Increments)  
Preset reduction/enlargement: 25%, 50%, 70%, 100%, 141%, 200%, 400%

Copy Features

Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Sort, Job Build, N on 1, Different Size Originals, Sharpness, Erase Frame, Copy ID Card, Skip Blank Pages, Free Size Original, Colour Mode, Reserved copy, Copy Sample

SCAN SPECIFICATIONS

Type

Standard: Duplexing Automatic Document Feeder [2-sided to 2-sided]

Document Feeder Paper Capacity (80 gsm)  
Acceptable Originals and weights

Up to 100 sheets  
  
Platen: Sheet, Book and 3-Dimensional objects  
Document Feeder media weight :

Supported media sizes

1-sided scanning: 30 to 128 gsm (BW), 64 to 128 gsm (CL)  
2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)  
Platen: max. scanning size: 297.0 x 431.8 mm  
Document Feeder media size:  
11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Custom Size: 2-3/4" x 5-1/2" to 12" x 17" (69.9 mm x 139.7 mm to 304.8 mm x 431.8 mm)



# TECHNICAL SPECIFICATIONS

# imageRUNNER C3326i

<b>Scan Speed</b>	DADF (ipm: BW/CL, A4): 1-sided Scanning: 70/70 (300 dpi, send), 51/42 (600 dpi, copy) 2-sided Scanning: 35/35 (300 dpi, send), 25.5/25.5 (600 dpi, copy)	<b>SECURITY SPECIFICATIONS</b>	
<b>Scan Resolution (dpi)</b>	Scan for Copy: up to 600 x 600 Scan for Send: (Push,BW) up to 600 x 600, (Pull,BW) up to 600 x 600 (Push,CL) up to 300 x 300, (Pull,CL) up to 300 x 300	<b>Authentication and Access Control</b>	User Authentication (Picture Login, Picture and PIN Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
<b>Pull Scan Specifications</b>	Scan for Fax: up to 600 x 600 Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows® 8.1/10/11/ Server2012/Server2012 R2/Server 2016/Server 2019/Server2022	<b>Document Security</b>	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print*), Recieve Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS*), Send Data Security (Restricted E-mail/ File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/ Restrict Sending from History, S/MIME Support)
<b>Scan Method</b>	PushScan, PullScan, Scan to Network, Scan to USB Memory Key, Scan to Mobile device, Scan to cloud-based services (uniFLOW Online/Online Express)		*1 Requires optional uniFLOW Online / uniFLOW *2 Requires optional Universal Send Digital User Signature Kit-C1
<b>SEND SPECIFICATIONS</b>		<b>Network Security</b>	TLS 1.3, IPSec, IEEE802.1X authentication, SNMP V3.0, WPA3 support, Firewall Functionality (IP/ MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling/Enabling (Network Protocols/ Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Scan and Send -Virus Concerns for E-mail Reception
<b>Destination</b>	Standard: E-mail/Internet FAX (SMTP), SMB3.1.1, FTP, WebDAV, Optional: Super G3 FAX		
<b>Address Book</b>	LDAP (2,000)/ Local (1,600) /Speed dial (200)	<b>Device Security</b>	Standard Storage Initialize, Job Log Conceal Function, Protecting MFP Software Integrity, Checking MFD Software Integrity & Platform Firmware Resiliency (NIST SP800-193) with Automatic System Recovery (Verify System at Startup, Runtime Intrusion Detection enabled with McAfee Embedded Control),
<b>Send resolution (dpi)</b>	Push: 100 x 100, 150 x 150, 200 x 100 (Normal), 200 x 200 (Fine), 200 x 400*(SuperFine), 300 x 300, 400 x400*(UltraFine), 600 x 600* Pull: 75 x 75, 100 x 100, 150 x 150, 200 x 200, 300 x 300, 400 x 400*, 600 x 600* *Colour mode is black and white only	<b>Device Management and Auditing</b>	Administrator Password, Digital Certificate and Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Security Policy Setting, Remote Management Two-factor Authentication
<b>Communication protocol</b>	File: FTP (TCP/IP), SMB3.1.1 (TCP/IP), WebDAV Email/iFax: SMTP (send), POP3 (receive)		
<b>File Format</b>	Standard: TIFF (MMR), JPEG *, PDF (Compact, Searchable, PDF/A-1b, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature, Office Open XML (PowerPoint, Word)) Optional: PDF (Trace & Smooth), PDF/XPS (User Signature) *Single page only		
<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation	<b>ENVIRONMENTAL SPECIFICATIONS</b>	
		<b>Operating Environment</b>	Temperature: 10 to 30 °C Humidity: 20 to 80% RH (Relative Humidity)
<b>FAX SPECIFICATIONS</b>		<b>Power source</b>	220-240V 50/60Hz 4A
<b>Maximum Number of Connection Lines</b>	1	<b>Power consumption</b>	Maximum: Approx. 1,500 W Standby: Approx. 44 W*1 Sleep mode: Approx. 2.0W*2, Approx. 1.0W*3
<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps		*1 Reference value: measured one unit * Wireless LAN power serve mode OFF * Wireless LAN power serve mode ON **3 Sleep mode is not available in all circumstances due to certain settings.
<b>Compression Method</b>	MH, MR, MMR, JBIG		Typical Electricity Consumption (TEC)*: 0.32 kWh Note: As per US Energy Star 3.0
<b>Resolution (dpi)</b>	400 x 400 (Ultrafine), 200 x 400 (Superfine), 200 x 200 (Fine), 200 x 100 (Normal)		
<b>Sending/Receiving Size</b>	*		
<b>FAX memory</b>	* Up to 30,000	<b>Noise levels (BW/CL)</b>	<u>Sound Power Level (LWA,m)</u> Active (1-sided) : 6.0B*1, 0.3B*1
<b>Speed dials</b>	pages Max. 200		<u>Sound Pressure Level (LpAm)</u> Bystander's position: Active (1-sided) : 46 dB*1
<b>Group dials/destinations</b>	Max. 199 dials Max.		*1 Reference value: measured only one unit with ISO7779, described with ISO9296:2017 Blue Angel (Applied for)
<b>Sequential broadcast</b>	256 addresses Yes		
<b>Memory backup</b>		<b>Standards</b>	
<b>Fax Features</b>	Sender's Name (TTI), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox	<b>CONSUMABLES</b>	
		<b>Toner *1</b>	GPR-66 Toner BK/C/M/Y GPR-66L Toner C/M/Y
<b>STORE SPECIFICATIONS</b>		<b>Toner Yield</b>	GPR-66 Toner BK: 38,000 pages GPR-66 Toner C/M/Y: 25,500 pages GPR-66L Toner C/M/Y: 11,000 pages
<b>Memory Media</b>	Standard: USB Memory		*1 GPR-66L Toner also available for Colour (C, M, Y). Yield (estimated @ 5% coverage) is 11,000 images



TECHNICAL  
SPECIFICATIONS

imageRUNNER C3326i

SOFTWARE AND  
PRINTER MANAGEMENT

Tracking and reporting  
Remote management  
tools

Scanning software

uniFLOW Online Express  
iW Management Console  
eMaintenance  
Content Delivery System  
ScanGear

HARDWARE  
ACCESSORIES

Card Readers  
Others

IC Card Reader Attachment-B4

SYSTEM AND  
CONTROLLER OPTIONS

Print Accessories

PCL International Font Set-A1  
PS Printer Kit-CS1  
Optional Data Storage Kit-A1  
Universal Send Trace & Smooth PDF Kit-A1  
Universal Send Digital User Signature Kit-C1  
Barcode Printing Kit-D1  
Copy Control Interface Kit-D1  
Super G3 FAX Board-BN1  
Remote Fax Kit-A1

Data Storage  
Send Options

Barcode Printing  
System Accessories  
Fax Accessories

OTHER OPTIONS

Accessibility Accessories

ADF Access Handle-A1  
Staple-P1

Staple Cartridges

Software & Solutions



Compatibility



Canon Canada  
canon.ca  
English edition  
© Canon Canada Inc, 2023