

## MULTIFUNCTIONAL



Today's marketplace necessitates the ability to be resilient and versatile while improving efficiency. At the same time, meeting tight deadlines with a lean staff requires equipment that's intuitive, adaptive, and reliable and can consistently produce work with minimal effort. Introducing the imagePRESS C270 Series of multifunction printers—an outstanding investment that's designed to deliver the workflow, user-centric control, and remarkable print quality that your essential work demands.

### **WORK EFFICIENTLY**

#### **EASY, INTUITIVE, AND CONSISTENT**

The imagePRESS C270/C265 multifunction printers are designed to be in sync with how users work. All models feature a large 10.1" touchscreen that's responsive and intuitive, making operation clear and virtually seamless.

User-friendly techniques echo the operation of smartphones and tablets. When utilizing an imagePRESS or imageRUNNER ADVANCE DX model, the interface remains consistent, allowing work to proceed effortlessly and with a minimal learning curve.


D

#### A CUSTOMIZED EXPERIENCE

You can customize your experience to your personal preference. Once logged in, you can see your preferred default log-in screen and desired language; preferred settings for Copy, Send, Fax, and Store; accessibility settings; easy recall of previous job settings; and more—following you from compatible, networked device to device. You can also take advantage of single sign-on (SSO) to access and scan to available cloud destinations.<sup>1</sup>

With Hot Folders, you can drag-and-drop files (PDF, JPG, or TIFF) to shared folders of Advanced Box on the MFP. Files are printed with the print settings set beforehand by the administrator for each specific folder. No driver is needed for this setup. This is an ideal solution for utilizing repetitive tasks and workflows and to help administrators manage drivers.

Subscription to a third-party cloud service required.
 Subject to third-party cloud service providers' Terms and
 Conditions.

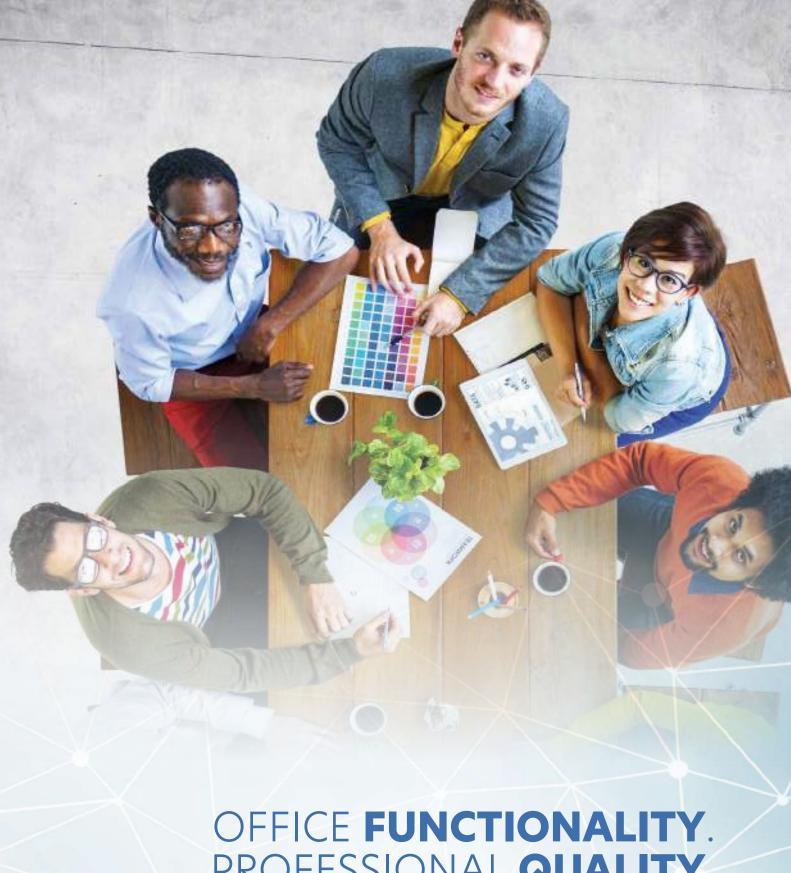

## PROFESSIONAL QUALITY.

The imagePRESS C270 Series is the solution for all your printing needs. In any business, this versatile multi-function device easily handles your day to day document workflows while also giving you the option to print high quality marketing material.

#### **OUTSTANDING PRODUCTIVITY**

Some models in the imagePRESS C270 Series can reach maximum production speeds of up to 70/80 ppm (Colour/BW). Also, the Single Pass Duplex Colour Scanner converts paper documents into digital files up to 270/270 ipm at 300 dpi (Colour/BW).

#### **KEEPS RUNNING**

Slowdowns and interruptions can cost time and money. That's why Canon designed the imagePRESS C270 Series with a range of impactful features that can help maximize productivity. Outstanding toner, drum, and part yields can help you by minimizing downtime so you can complete required tasks. Even better, toner and paper can be replenished on-the-fly—no need to interrupt printing.



Print your work on the stock that makes the right impact. The imagePRESS C270/C265 support a wide variety of media, including coated and heavy stocks up to 350 gsm. Extend your reach by printing on specialty stocks, including tabs, envelopes, and even long sheet up to 1,300 mm.

A standard paper capacity of up to 3,300 sheets<sup>3</sup> helps long jobs run without having to stop for paper replenishment.

#### **WORK EASIER**

The interface was designed for maximum ease of use. Functions are quickly initiated with clearly identifiable on-screen buttons that can be organized to fit the way you work. Repetitive or complicated tasks can be assigned to a single button on the interface, speeding workflow through less manual intervention.

- <sup>2</sup> Options required.
- <sup>3</sup> Capacity based on 80 gsm A4.

EXCEPTIONAL




## TECHNOLOGY OVERVIEW



R-VCSEL LASER TECHNOLOGY Advanced 32-beam red VCSEL laser delivers 2,400 x 2,400 dpi, outputting detailed colour images with outstanding definition at high speeds.





MULTI D.A.T. TECHNOLOGY
Multi-gradation density patches
are measured and corrected
during production automatically,
which helps ensure consistent
halftones during production.



ADVANCED IMAGING TRANSFER BELT

Flexible belt presses the toner into the media, enabling a high-density image transfer onto embossed and textured stocks.



**TRANSLUCENT CV TONER**Helps produce consistent,
vivid, and crisp images on a
wide range of media with a

realistic, offset-like finish.



LOOP SENSOR CONTROL Controls media alignment throughout printing to help maintain high quality on heavy, coated, and banner stocks.



SECURITY FEATURES
Control who has access to the device — and to which features — using a host of flexible authentication methods, such as picture log-in, PIN code, user name/password, or card access.5





**WORKFLOW EFFICIENCY** A unique, customized experience tailored to individual preferences is delivered on a 10.1" intuitive touch-screen.



COST MANAGEMENT<sup>5</sup>
Apply print policies and restrict usage by user to help reduce unnecessary printing and contribute to cost efficiency.



**DEVICE AND FLEET** 

MANAGEMENT<sup>5</sup>
uniFLOW Online\*\* captures,
archives and shares
information, so you can
centralise control of all
document workflows and make
collaboration easier

<sup>5</sup> Optional accessories may be required.

## WHITE PAPER IN — CAPTIVATING PRODUCT OUT

With advanced paper handling and multiple finishing capabilities, the imagePRESS C270/C265 can handle a wide range of jobs efficiently and cost-effectively. From professional punching to folding and saddle-stitching, you can have the ability to satisfy more people and keep more in-house

#### FINISHING OPTIONS







#### **Staple Finishing**

Corner and double-side staple up to 65 or 100 sheets6 in stacks up to 3,500 or 5,000 sheets.6 A side jogger helps keep media in straight or offset stacks.



#### **Paper Folding**

Offer promotional pamphlets, brochures, and more with the ability to produce Z-fold, C-fold, accordion fold, and double-parallel fold documents.



#### **Professional Punching**

Ideal for manuals, reports, and presentations, this module offers numerous die patterns to take some of the manual labor out of the binding process.



#### **Saddle Finishing**

Create saddle-stitched booklets up to 80 or 100 pages<sup>6</sup> on paper sizes up to 13" x 19.2". Saddle Press technology applies additional pressure when folding to help booklets exit flat.8



#### **Booklet Trimming**

Trim up to 1.1" off the face-side of the book for that professionallooking edge. Help maintain high productivity with a largecapacity trim waste bin and on-the-fly waste removal for continuous production.

#### **FEEDING OPTIONS**



#### **Stack Bypass (Standard)**

Provides an additional capacity of up to 250 sheets.6 Supports all paper types and stocks in weights up to 350 gsm. Cover and banner sheets up to 1300 mm in length.7



#### **A4 Paper Deck**

Designed for locations with higher enterprise work, this deck holds up to 3,500 sheets6 of A4-sized stocks and in weights up to 256 gsm.



#### **POD Deck Lite**

Designed for locations with space restrictions, this deck's 3,500-sheet<sup>6</sup> capacity with Air Assist and Air Separation supports paper sizes up to 13" x 19.2" and envelopes in a range of sizes and weights up to 350 gsm.

- Capacity based on 80 gsm A4.
- Optional accessories may be required, Saddle Press technology only available



## **SECURITY**





#### **PREVENTIVE SECURITY**

Ensure your device security during initialisation with system verification at startup, which provides protection against unknown firmware from being installed. With syslog protocol, real time security information can also be fed to a third party solution for a complete monitoring protection.



#### **DEVICE SECURITY**

Canon is serious about protecting your organisation's confidential information, your ability to control access, and the availability of your company data. With multiple authentication methods to choose from, you can control and limit users access to your devices, prevent unauthorised distribution of sensitive information. Visual and audible original reminder notifications can alert you to sensitive documents that are left at the device. ensuring confidentiality.



### DATA AND NETWORK SECURITY

Canon's multilayered security solutions help safeguard sensitive data stored on the device and during transmission:

- HDD/ SSD Initialise removes and overwrites all data on the hard disk/solid state drive at the end of life
- HDD Data Encryption helps protect information even after hard drive removal and it's now FIPS 140-2 validated on select models.
- IPsec helps provide security for data as it traverses the network.
- SMB 3.0 provides communication route encryption, which enables files to be transmitted to SMB3.0 servers more securely.
- TPM 2.0 (Trusted Platform Module) securely stores encryption keys, such as passwords on select models.to be transmitted to SMB3.0 servers more securely.

## imagePRESS Server M20 Fiery FS500

Get the most out of your Canon imagePRESS C265/C270 printer by combining it with the imagePRESS Server M20, to deliver high quality output with exceptional productivity.

#### **MORE PAGES IN LESS TIME**

- With the innovative Fiery ® FS500 software, productivity is taken to its maximum expression with a combination of processing power, management and automation tools to take the most out of your printer.
- Increase your production, reduce errors, plus make job management faster and more efficient with Fiery Command WorkStation®.with native processing of PDF files with Adobe PDF Print Engine.

#### FIRST CLASS AUTOMATION TOOLS

- Use server presets to make job submission fast and error-free. Or add the optional Fiery Automation Package to reduce job touchpoints and make your workflow even more efficient.
- Use the Fiery TrueBrand® application to print accurate brand colours from Microsoft Office applications in just a few clicks. No advanced colour knowledge required!
- The new optional Fiery JobExpert and PDF Processing Kit automatically sets the optimal job properties to achieve the highest print quality with the minimum processing time along with native processing of PDF files with Adobe PDF Print Engine.
- Offer personalised printing with the Fiery FreeForm<sup>TM</sup> Create. Quickly personalise existing files by adding variable elements such as text, images, or barcodes with just a few clicks.



# ENHANCED PRODUCTIVITY AND QUALITY TO MEET YOUR REQUIREMENTS

#### **Server Specification**

#### Fiery Driven™ engines

- Canon imagePRESS C265/C270 Hardware and platform
- Intel® Pentium® G5400 Processor
- 8 GB RAM
- 500 GB HDD
- Linux operating system
- Fiery Installer Builder
- Fiery FS500 software

#### **File format support**

- Adobe® PostScript® Levels 1, 2, 3
- Adobe PDF
- Enhanced PCL® 6/PCL 5
- MS Office document formats (doc/x xls/x, ppt/x, pub/x) via the Fiery driver or Fiery Hot Folders

#### Fiery colour and imaging technology

- Fiery ColorWise® colour management technology
- Fiery Edge<sup>™</sup> colour profiles
- Fiery Calibrator
- Fiery TrueBrand
- PANTONE® Color Enabled
- Image smoothing
- Fiery Spot-On™
- Fiery Image Enhance Visual

#### Editor (requires Fiery ColorRight Package)

- Auto trapping Adobe interpreter support
- CPSI version 3020
- Adobe PDF Print Engine® 5.51 (optional)

#### Device management and analytics

- EFI™ IQ™: Dashboard, Insight, Notify, Go
- EFI ColorGuard™ (optional)
- EFI Manage4 (optional)

#### **Performance**

- SmartRIP
- Spool-RIP-print simultaneously
- · Scan-RIP-print simultaneously

#### **Productivity and workflow**

- Fiery Command WorkStation®
- Fiery Hot Folders and Virtual

#### **Printers**

- Fiery JobExpert (optional)
- Fiery drivers for Windows and Mac<sup>®</sup>
- Fiery WebTools<sup>™</sup>
- Booklet Maker
- · Direct mobile printing
- Fiery Go (Android® and iOS)
- Print Time Estimation

#### Variable data printing

- Fiery FreeFormTM Create
- Supported file formats include Fiery FreeForm Plus, PDF/VT-1 (optional), Optimised Postscript® and PDF
- · VDP record range printing
- Define record length
- Record and set level finishing support
- VDP raster preview

#### Integration

- Canon Uniflow compatible
- Fiery JDF v1.8 (optional)
  - EFI MIS and Web-to-Print integration ready
  - Prepress workflow integration (Agfa® Apogee, Kodak® PRINERGY, Heidelberg® Prinect)

#### Optional Fiery software and hardware

- Fiery Automation Package<sup>1</sup>
  - Rush Print, Schedule Print, Print/Process Next, Fiery Preflight, Fiery JobFlow™ Base, Fiery JDF
- Fiery ColorRight Package<sup>1</sup>
  - Fiery Spot Pro, Fiery ImageViewer, Fiery Image Enhance Visual Editor, Fiery Postflight, Control Bar
  - Fiery JobExpert and PDF Processing Kit
  - <sup>a</sup> Fiery JobExpert. Adobe PDF Print Engine, PDF/VT-1 support
- Fiery Impose<sup>1</sup>
- Fiery Compose<sup>1</sup>
- Fiery JobMaster<sup>™ 1</sup>
- Fiery JobFlow¹ (requires Fiery Automation Package)
- Fiery Color Profiler Suite<sup>2</sup>
- ES-3000 spectrophotometer
- Adobe® Acrobat® Pro 2020 Kit

#### **SECURITY**

- Secure erase, Security Profiles, Security Audit Logs
- Port blocking, IP filtering, 802.1x authentication, IPsec encryption, HTTPs with TLS 1.3 support
- Enhanced certificates management. Fiery self-signed certificates are recreated automatically
- Secure printing, PostScript security, USB security
- Closed architecture
- Digitally signed software updates

#### **NETWORKING/CONNECTIVITY**

- TCP/IP, AppleTalk, Bonjour support, SNMP, Port 9100, IPP, FTP, SMB, WSD, point and print, print via email (PS/PDF), IPv6 support EMC
- FCC and ICES (US & Canada)
- CE Mark (EU)
- RCM (Australia & New Zealand)
- CCC (China)
- BSMI (Taiwan)
- KC Korea
- NEMKO
- CMIM Mark (Morocco)

#### SAFETY

- CB Scheme
- TÜV/CU Mark (Canada and US)
- TÜV/GS Mark (EU)
- CE Mark (EU)
- CCC (China)
- NEMKO N-Mark
- BSMI (Taiwan)

#### POWER SUPPLY AND CONSUMPTION

- Auto-switching: 100-240 VAC
- 50/60 Hz, 3 Amps @100 VAC
- 1.5 Amps @240 VAC
- Maximum / typical power usage: 80 W / 30 W
- 1 Free 30-day trial available
- <sup>2</sup> Free trial in demo mode

EFI<sup>TM</sup> is a global technology company, leading the worldwide transformation from analog to digital imaging. We are passionate about driving customers' business growth with a scalable portfolio of products, solutions, services, and world-class partnerships for the manufacturing of signage, packaging, textiles, ceramic tiles, building materials, commercial print, and personalised documents with a wide range of printers, inks, digital front ends, and workflow software. They work together to increase profits, cut costs, improve productivity, and optimise efficiency – job after job, year after year. Learn more at **www.efi.com** 

## **PRODUCT SPECIFICATION**



	0	36	0 0 0 0	8 H H W	A A A
MAIN UNIT - A3	Colour Lase	r Multi	functional		
Core functions	Print, Copy, Scan, Send, Store and Optional Fax				
Processor	1.8GHz Dual Core Processor				
Printing method	Colour Laser Beam Printing				
Control Panel	Standard		5.6 cm (10.1 inch) TFT LCD WSVGA Colour Touch panel		
Memory	Standard Main CPU Side Image Processing CPU Side		5 GB RAM 2 GB 2 GB + 1 GB (Reserved for Imaging Processing)		
Hard Disk drive	Standard GB Optional		SSD 256 GB SSD 1 TB		
Interface Connection	NETWORK OTHERS	Standard Optional Standard Optional	onal NFC, Bluetooth Low Energy dard USB 2.0 (Host) x2, USB 3.0 (Host) x1, USB 2.0 (Device) x1		ice) x1
Network Protocols	TCP/IP (FTP, SMTP, POP, HTTP, SNMP, LDAP, SLP, SMB, LPD, IPP, WS-Discovery, Bonjour, Direct Mobile Printing, Port 9100, SNTP, 802.1X, DHCP, DNS, NTP)			our, Direct Mobile Printing,	
Paper Supply Capacity (A4, 80gsm)	Standard: 3,550 sheets  Maximum: 7,050 sheets		250-sheet Multi-Purpose tray 1,100-sheet Paper Deck x 2, 550-sheet Paper Cassette x 2, with POD Deck Lite-C1 or Paper Deck Unit-E1		
Paper Supply Capacity (A4, 80gsm)	Standard: 250 sheets Maximum: 3,500 sheets Maximum: 5,000 sheets		with Copy Tray-R2 with Staple Finisher-AC1 or Booklet Finisher-AC1 with Stapler Finisher-AG1 or Booklet Finisher-AG1		
Finishing Capabilities	With options: Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand, Document Insertion, Z-fold, Half-fold, C-fold, Accordion-Z fold, Double Parallel-fold, Trimming.			, Staple On Demand, d, Trimming.	
Supported Media Types	Multi-purpose tray:		Thin, Plain, Recycled, Colour, Heavy, Coated, Textured, Tracing, Bond,		
*1 Tab Feeding Attachment-F1 is required *2 Envelope Feeder Attachment-F1 is required	Paper Decks (Right/Left):  Paper Cassettes: (Upper/Lower)		Transparency, Label, Pre-punched, Letterhead, Tab, Envelope Thin, Plain, Recycled, Colour, Heavy, Tracing, Bond, Transparency, Bond, Pre-punched, Letterhead Thin, Plain, Recycled, Colour, Heavy, Bond, Transparency, Pre-punched, Letterhead, Tab <sup>*1</sup> , Envelope <sup>*2</sup>		
Supported Media Sizes	Multi-purpose tray	· · ·		5R A6R B4 B5 B5R	
*1 by service mode	Paper Decks (Right/Left) Paper Cassettes (Upper/Lower)		Custom size Long size Free size Envelope Envelope custom size Standard size Standard size Custom size Envelope Envelope Envelope Envelope custom size	90.0 x 148.0 mm to 330.2 210.0x487.8 mm to 330.2 100.0 x 148.0 mm to 330. COM10 No.10, Monarch, 90.0 x 148 mm to 330.2 x A4, B5 SRA3, A3, A4, A4R, A5, A5 139.7 x 182.0mm to 330.2 COM10 No.10, Monarch, 98.0 x 148.0mm to 330.2	x 487.7 mm x1,300.0mm*1 2 x 487.7 mm DL, ISO-C5 487.7 mm 5R, A6R, B4, B5, B5R x 487.7mm DL, ISO-C5
Supported media weight	Multi-purpose tray Paper Deck (Right/Left)		52 to 350 gsm 52 to 220 gsm	Paper Deck (Right/Left) Duplex	52 to 220 gsm 52 to 220 gsm
Warm-up Time	Quick Startup Mode From Power On From Sleep Mode		4 seconds or less (Time until key operations can be performed on the touch panel display 30 seconds or less (Time until it becomes possible to start copying) 30 seconds or less		
Dimensions (W x D x H)	689 x 937 x 1,185 mi	n			
Installation Space (W x D)	Basic Fully Configured Fully Configured	+ Booklet F 2,621 x 1,52 + Booklet F 5,900 x 1,52	1,524 mm (with Front door open + Multi-purpose tray/upper-right cover open + Buffer Pass-M et Finisher-AC1/extension tray & rotary tray extended) 1,524 mm (with POD Deck Lite-C1 + Buffer Pass-M1 + Document Insertion Unit-Q1 et Finisher-AC1/extension tray extended) 1,524 mm (with Multi Drawer PD-E1 + Stack Bypass Tray-B1 + Buffer Pass-M1 + Insertion Unit-F		
Weight	Approx 261 kg (inc	Conveyor-E	31/extension tray extend		ner G1 + 2-Knife Trimmer-G1 + Trimmer
weight	Approx. 261 kg (including toner)				

Product images are for illustration purposes only. Certain functions are optional. Please refer to the product specifications or contact your Canon sales representative for further details.

Print Speed A4	imagePRESS C265	imagePRESS C270		
*A5/A6R (1-sided)	65 ppm CL and 70 ppm BW (A4, A5*, A5R, A6R*) 32 ppm CL and 35 ppm BW (A3)	70 ppm CL and 80 ppm BW (A4, A5*, A5R, A6R*) 35 ppm CL and 40 ppm BW (A3)		
Monthly Duty Cycle	imagePRESS C265 - 330,000 pages	imagePRESS C270 - 390,000 pages		
Target (Max) Print/ Copy	Up to 100,000 pages per month			
Alignment Tolerance	Cross track: 2.0 mm or less, In track: 1.2mm or less			
Print Resolution (dpi)	2,400 dpi x 2,400 dpi			
Page Description Languages	Standard UFR II, PCL6 Option Adobe Postscript 3			
<b>Direct Print</b> *Only PDF print from websites is supported.	Direct printing available from USB memory, Advanced box, Remote UI and Web Access* Supported File Types: PDF, TIFF, JPEG, EPS, XPS			
Fonts	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT  J/K/S/T* (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts**  *Requires optional PCL INTERNATIONAL FONT SET-A1 **Require optional BARCODE PRINTING KIT-D1			
Print Features	Secured Print, Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold Printing, Scheduled Printing, Printing Using a Virtual Printer			
Operating System	Mac OS X (10.11 or later).  PCL	Windows® 8.1 / 10 / 11 / Server 2012 / Server 2012 R2 / Server 2016 / Server 2019 / Server 2022. Windows® 8.1 / 10 / 11 / Server 2012 / Server 2012 R2 / Server 2016 / Server 2019 / Server 2022,		

COPY SPECIFICATIONS				
Copy Speed (CL/BW)	imagePRESS C265 65 / 70 ppm: A4, A5*, A5R, A6R* 46 / 49 ppm: A4R 32 / 35 ppm: A3 imagePRESS C270 70 / 80 ppm: A4, A5*, A5R, A6R* 49 / 56 ppm: A4R 35 / 40 ppm: A3 *1-sided	First-Copy-Out Time	Approx. 4.8/5.9 seconds or less	
		Copy resolution (dpi)	600 x 600	
		Multiple Copies	Up to 9,999 copies	
		Copy Density	Automatic or Manual (9 Levels)	
		Magnification	25% - 400% (1% Increments)	
		Preset Reductions	25%, 50%, 70%, 100% (1:1)	
		Preset Enlargements	141%, 200%, 400%	

SCAN SPECIFICATIONS	5				
Туре	Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] *Detect Feeder Multi Sheet Feed is supported.				
Document Feeder Paper Capacity	Up to 200 Sheets (80 gsm)				
Acceptable Originals	Platen: Sheet, Book, 3-Dimensional Objects				
and Weights	Document Feeder Media Weight:	1-sided scanning: 38 to 220 gsm (BW/CL) 2-sided scanning: 38 to 220 gsm (BW/CL) *An acceptable weight of A6R or smaller is 50 to 220gsm.			
Supported Media Sizes	Platen Max. Scanning Size:	297 x 431.8mm			
	Document Feeder Media Size:	A3, A4, A4R, A5, A5R, B4, B5, B5R, B6R			
	Custom Size:	70.0 x 139.7 mm to 304.8 x 431.8 mm			
Scan Speed (ipm: BW/CL,A4)	Single-sided Scanning: Double-sided Scanning:	135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy) 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy)			
Scan Resolution (dpi)	Scan for Copy Scan for Send Scan for Fax	600 x 600, (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 *Requires Envelope Feeder Attachment-G1			
Pull Scan Specifications	Color Network ScanGear2. For both Twain and WIA Supported OS: Windows® 8.1 / 10 / 11 / Server 2012 / Server 2012 R2 / Server 2016 / Server 2019 / Server 2022				

SEND SPECIFICATIONS	
Destinations Address book	E-mail/Internet FAX (SMTP), SMB v3.0, FTP, WebDAV, Mailbox, Super G3 FAX (Optional), IP Fax (Optional) LDAP (2,000) / Local (1,600) / Speed dial (200)
Scan Resolution (dpi)	600 x 600
Communication Protocol	File: FTP (TCP/IP), SMB v3.0, WebDAV E-mail/I-Fax: SMTP, POP3
File Format	TIFF, JPEG, PDF (Compact, Searchable, Apply policy, Optimize for Web, PDF/A-1b, Trace & Smooth Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)
Universal Send	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, Email Priority, TX Report, Original Content Orientation, Skip Blank Pages

Maximum Number	1	Speed Dials		Max. 200 dials
of Connection Line		Group Dials/D	estinations	Max. 199 dials
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps	Sequential Bro	adcast	Max. 256 addresses
Compression Method	MH, MR, MMR, JBIG	Memory Back	Jp	Yes
Resolution (dpi)	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)	(when sending fax), Direct Send, I Preview, Job Done Notice, TX Rep		ame (TTI), Selecting the Telephone Line ding fax), Direct Send, Delayed Send, b Done Notice, TX Report, Interrupt
Sending/Recording Size	A3, A4, A4R, A5* <sup>1</sup> , A5R* <sup>1</sup> , B4, B5* <sup>2</sup> , B5R* <sup>1</sup>		Transmission, Sequential broadcasting, Passwo	
FAX Memory	Up to 30,000 pages (2,000 jobs)	Sub-address Sending, Confidential 2 on 1 Log		ss Sending, Confidential Mailbox,

INPUT ACCESSORY SP	ECIFICATIONS					
POD Deck Lite-C1	Paper Capacity	3,500 sheets (80 gsm)				
1 ob beek like et	Paper Types	Thin, Plain, Recycled, Color, Thick, Pre-punched, Label, Letterhead, Bond, Coated, Transparency, Tab, Tracing, Envelope*, Textured				
	Paper Size	Standard size: A3, A4, A4R, A5R, B4, B5, B5R, Envelope [No.10 (COM10), Monarch, DL,ISO-C5] 139.7mm x 148.0 mm to 330.2mm to 487.7mm *Requires Envelope Feeder Attachment-G1				
	Paper Weight Power Source	52 to 350 gsm 220-240V/1.2A 50/60Hz				
Dimensions Weight		(W x D x H) 633mm x 686mm x 574 mm (attached to the main unit)  Approx. 68.0 kg				
Stack Bypass Tray-D1	Paper Capacity	250 sheets (80 gsm)				
(Multi-purpose tray)	1 / /		k, Color, Transparency, Label, Tracing, Envelope, Coated, Textured,			
	Paper Size:	Standard size:	A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Envelope [No.10 (COM10),			
		Envelope custom size: Custom size : Free size Long sheet*:	Monarch, ISO-C5, DL] 90.0 x 148.0 mm to 330.2 x 487.7 mm 100.0 x 148.0 mm to 330.2 x 487.7 mm 100.0 x 182.0 mm to 330.2 x 487.7 mm 210 x 487.8 mm to 330.2 x 1,300 mm *Requires Long Sheet Tray-B1 and Stace Bypass Alignment Tray-D1			
	Paper Weight	52 to 350 gsm				
Paper Deck Unit-E1	Paper Capacity Paper Types	3,500 sheets (80 gsm)  Thin Plain Pacycled Color Thick Pre-punched Letterhead Bond				
	Paper Size	Thin, Plain, Recycled, Color, Thick, Pre-punched, Letterhead, Bond  A4, B5, LTR* *Media size change requires service technicians				
	Paper Weight	52 to 256 gsm				
	Power Source	From the Main Unit				
	Dimensions	(W x D x H) 340mm x 630mm x 572 mm (attached to the main unit)				
	Weight	Approx. 34.0 kg				
OUTPUT OPTIONS						
Copy Tray	Copy Tray-R2					
		e tray for basic output need 00 sheets (1-sided/2-sided, 8				
Staple Finisher-AC1	Upper Tray A4/A5/A5R/B5: 250 sheets, SRA3/A3/A4R/B4/B5R: 125 sheets, Envelope: 30 sheets		Paper Weight Upper Tray / Mid Tray: 52 to 256 gsm			
			Lower Tray:52 to 350 gsm  Staple Position Corner, Double			
			Staple Position Corner, Double Staple Capacity A4/B5: 65 sheets (52-90 gsm),			
	Mid Tray:		A3/A4R/B4: 40 sheets (52-90 gsm)			
	A4/A5/A5R/B5 2: SRA3/A3/A4R/B4 Envelope: 30 she	1/B5R: 125 sheets	Eco Staple A3/A4: 10 sheets (52 to 64 gsm) 8 sheets (65 to 81.4 gsm) 6 sheets (82 to 105 gsm)			
	Lower Tray:		Staple On Demand: 65 sheets (52 to 90 gsm)			
		1000 sheets (80 gsm), 1/B5R: 1500 sheets (80 gsm)				
	A6R: 250 sheets (80 gsm)		Dimensions (WxDxH): 527 (Max 656*) x 623 x 1.099 (Max 1.195*) mm			
*when the auxiliary tray is extended.	Envelope: Monai DL, ISO-C5: 100 s	rch: 30 sheets, COM10 No.10 sheets	<u>Weight</u> : Approx. 36 kg			
Booklet Finisher-AC1	Booklet Stitch Po		R, B4, Custom size (195 x 270 mm to 304.8 x 457.2 mm)			
(External)			heet 52-220 gsm, Cover sheet 52-256 gsm t Stitch Staple Capacity 20 sheets x10 sets (52-81.4 gsm)			
(Includes the above Staple Finisher-AC1 basic staple	Non-Staple Folde					
specifications)	Power Source	From th	ne main unit			
	Dimensions (W x Weight	D x H) 527 (M Approx	: 656*) x 623 x 1,099 (Max 1,195*) mm 60 kg			
Finisher Jogger Kit-A1	Attached to the Lower Tray of either the STAPLE FINIS		<u> </u>			
	Paper Size:	<non-s< td=""><td>Sort&gt; A3, A4, A4R, B4, B5, B5R, <bunch shift=""> A3, A4, A4R, B4, B5</bunch></td></non-s<>	Sort> A3, A4, A4R, B4, B5, B5R, <bunch shift=""> A3, A4, A4R, B4, B5</bunch>			
	Paper Weight:	<non-s< td=""><td>Sort&gt; 52-300 gsm, <bunch shift=""> 52-256 gsm</bunch></td></non-s<>	Sort> 52-300 gsm, <bunch shift=""> 52-256 gsm</bunch>			
Staple Finisher-AG1			Paper Weight 52-350 gsm			
(External) Requires the Accessory	SRA3/A3/A4/A4F 1,000 sheets (64	R/A5/A5R/A6R/B4/B5/B5R: -324 asm),	Staple Position Corner, Double			
Interface Kit-A2	200 sheets (325-350 gsm) Long sheet* <sup>2</sup> (210 x 487.8 mm to 330.2 x 762 mm) 100 sheets (52-79 gsm)		Staple Capacity (including Staple On Demand):  A4/B5: 100 sheets (52-80 gsm)			
			A3/A4R/B4/B5R: 50 sheets (52-81.4 gsm)  Power Source 220-240V, 50-60Hz, 8A			
	Lower Tray Capa		<u>Dimensions</u> (W x D x H): 860 x 792 x 1,239 mm			
	A4/B5: 4,000 sheets*3 (64-324 gsm), 400 sheets (325-350 gsm) A3/B4: 1,500 sheets*4*5 (80 gsm), SRA3/A3/A4R/B4: 1,000 sheets (64-324 gsm), 200 sheets (325-350 gsm)		(When the extension tray is extended)			
			Weight Approx. 130 kg			
	B5R: 1,000 sheet 200 sheets (325-		*1 301-350 gsm: 200 sheets regardless of size *2 Optional LONG SHEET TRAY-B1 is required			
Booklet Finisher - AG1		Staple Finisher-AG1 basic stapl	e specifications			
(External)	Saddle Stitch Pa	per Size SRA3, A	A3, A4R, B4, Custom size (210.0 x 279.4 mm to 330.2 x 487.7 mm)			
Requires the Accessory Interface Kit-A2	Saddle Stitch Sto		ets (52-80 gsm) (Including 1 cover sheet)			
	Power Source Dimensions (W x		(, 50-60Hz, 8A P2 x 1,239 mm (when the extension tray is extended)			
	Weight		(. 180 kg			
		1.17	·			



#### **SOUTH & SOUTHEAST ASIA REGIONAL HEADQUARTERS**

CANON SINGAPORE PTE. LTD.

1 Fusionopolis Place Galaxis #14-10 Singapore 138522

CANON SALES SUBSIDIARIES & BUSINESS PARTNERS

#### **HONG KONG**

Canon Hongkong Co. Ltd 5/F, Tower A, China Life Center, 18 Hung Luen Road, Hung Hom, Kowloon, Hong Kong

Tel: 852 3191 2388 Fax: 852 2369 3800 https://hk.canon

#### **MALAYSIA**

Canon Marketing (Malaysia) Sdn Bhd No.6-2-01, Tower 6, UOA Business Park, Jalan Pengaturcara U1/51A, Seksyen U1 40150 Shah Alam, Selangor Darul Ehsan, Malaysia Tel: 1800-88-2000

Fax: 60-3-5567 9441 https://my.canon

#### **INDIA**

Canon India Private Limited 7th Floor, Tower B, Building # 5, DLF Epitome, DLF Phase III, Gurgaon 122002

Tel : 91-124-4160000 Fax : 91-124-4160011 https://in.canon

#### **PHILIPPINES**

Canon Marketing (Philippines), Inc. 7/F Commerce and Industry Plaza, 1030 Campus Avenue Corner Park Avenue, McKinley Hill, Fort Bonifacio Taguig City, Metro Manila Philippines 1634 Tel: 632-884 9090

Fax: 632-556-1456 https://ph.canon

#### **INDONESIA**

PT Samafitro Jalan Ir. H Juanda No. 8 Jakarta 10120, Indonesia

Tel: 61-21-2949 5500 Fax: 62-21-384 4271 www.samafitro.co.id

#### **TAIWAN**

Canon Marketing (Taiwan)
Co. Ltd
19F, No. 100, Sec. 2
Roosevelt Road,
Taipei, Taiwan
Tel: +886-2-6632-8888

Fax: +886-2-7725-5860 https://tw.canon

#### **THAILAND**

Canon Marketing (Thailand)
Co. Ltd
98 Sathorn Square Office
Tower,
22nd - 24th Floor,
North Sathorn Road,
Silom, Bangrak,
Bangkok 10500
Tel: 66-2-344 9999
Fax: 66-2-344 9960

#### VIETNAM

https://th.canon

Canon Marketing (Vietnam)
Co. Ltd
Level 10, President Place,
93 Nguyen Du, Dist 1,
Ho Chi Minh City, Vietnam
Tel: 84-8-3820 0466
Fax: 84-8-3820 0477
https://vn.canon